



**RACCORDI
AUTOMATICI PVDF**

PVDF PUSH-IN FITTINGS

Bussola in AISI 316
AISI 316 bush

Guarnizione in PVDF
PVDF seal


Corpo in PVDF
PVDF body

Anello estrattore in PVDF
PVDF thrust ring

Pinza in 1.4310
Clamp as 1.4310

O-ring FPM
FPM O-ring

Nipplo in AISI 316
AISI 316 Nipple

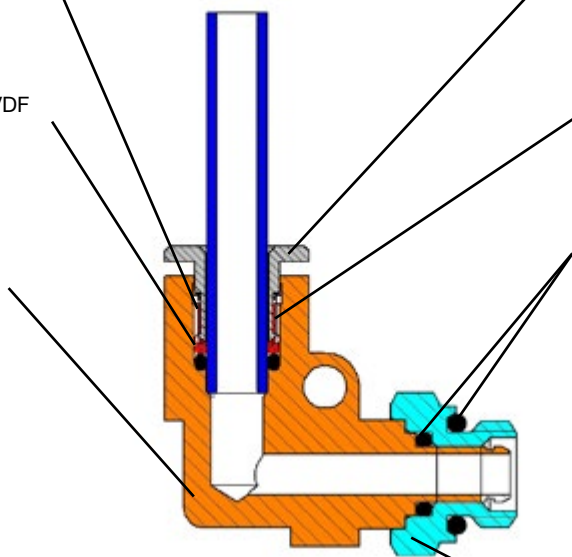

Disponibilità standard	Ø Tubo da 4 a 12 mm filetto da M5 a 3/8"	
Materiali	vedi disegno	
Temperatura di utilizzo	Ambiente	-20°C + 60°C
	Fluidi	-20°C + 120°C
Pressione di Utilizzo	16 bar / Max Temp. 20°C	
	10 bar / Max Temp. 100°C	
	3 bar / Max Temp. 120°C	
Filettature	Gas Cilindriche	Iso 228 classe A
Impiego	Alimentare - Industria Chimica e Medica Trattamento Acqua	
Tubazioni	Nylon - PA11- PA12 - poliuretano Polietilene	
Opzioni	-	

Standard supply	Ø Tube from 4 to 12 mm Thread from M5 to 3/8"	
Material	See drawing	
Use temperature	Room	-20°C + 60°C
	Fluid	-20°C + 120°C
Use Pressure range	16 bar / Max Temp. 20°C	
	10 bar / Max Temp. 100°C	
	3 bar / Max Temp. 120°C	
Thread	Parallel Gas	Iso 228 A category
Use	Food, Chemical and Medical Industry, Water Treatment	
Tube	Nylon - PA11- PA12 - Polyurethane Polyethylene	
Options	-	

Raccordo diritto intermedio

Straight connector



Code	Ø	Ø1	L
UR034PVDF	4	-	31,0
UR036PVDF	6	-	32,0
UR038PVDF	8	-	36,0
UR0310PVDF	10	-	41,0
UR0312PVDF	12	-	46,0
UR0346PVDF	4	6	31,5
UR0368PVDF	6	8	35,5
UR03810PVDF	8	10	40,5

Raccordo a gomito intermedio

Elbow connector



Code	Ø	Ø1	L	L1
UR044PVDF	4	4	18,3	18,5
UR046PVDF	6	6	19,0	19,0
UR048PVDF	8	8	22,0	22,0
UR0410PVDF	10	10	26,0	26,0
UR0412PVDF	12	12	31,0	31,0
UR0446PVDF	4	6	19,0	18,5
UR0468PVDF	6	8	22,0	21,5
UR04810PVDF	8	10	26,0	25,5

Raccordo a T intermedio

Tee connector

Code	Ø	Ø1	L
UR054PVDF	4	-	18,5
UR056PVDF	6	-	19,5
UR058PVDF	8	-	22,0
UR0510PVDF	10	-	26,0
UR0512PVDF	12	-	31,0
UR0546PVDF	4	6	19,0
UR0568PVDF	6	8	22,0
UR05810PVDF	8	10	28,0



Raccordo a T girevole centrale con OR

Swivel tee parallel central adapter with O-ring

Code	Ø	F	P	L	L1	CH
UR20184PVDF	4	1/8	5	18,5	19,5	13
UR20144PVDF	4	1/4	7	18,5	20,0	17
UR20186PVDF	6	1/8	5	19,0	19,5	13
UR20146PVDF	6	1/4	7	19,0	20,0	17
UR20188PVDF	8	1/8	5	22,0	22,0	14
UR20148PVDF	8	1/4	7	22,0	22,5	17
UR201388PVDF	8	3/8	8	22,0	22,5	19
UR201410PVDF	10	1/4	7	26,0	25,5	17
UR203810PVDF	10	3/8	8	26,0	25,5	19
UR201412PVDF	12	1/4	7	31,0	30,5	17
UR203812PVDF	12	3/8	8	31,0	30,5	19



Raccordo a gomito cilindrico maschio con OR

Elbow male parallel adapter with O-ring



Code	Ø	F	P	L	L1	CH1
UR22M54PVDF	4	M5	3,5	17,0	9,0	8
UR22184PVDF	4	1/8	5	18,5	19,5	13
UR22144PVDF	4	1/4	7	18,5	20,0	17
UR22M56PVDF	6	M5	3,5	18,0	10,0	8
UR22186PVDF	6	1/8	5	19,0	19,5	13
UR22146PVDF	6	1/4	7	19,0	20,0	17
UR22188PVDF	8	1/8	5	22,0	22,0	14
UR22148PVDF	8	1/4	7	22,0	22,5	17
UR22388PVDF	8	3/8	8	22,0	22M5	19
UR221410PVDF	10	1/4	7	26,0	25,5	17
UR223810PVDF	10	3/8	8	26,0	25,5	19
UR221412PVDF	12	1/4	8	31,0	30,5	17
UR223812PVDF	12	3/8	8	31,0	30,5	19



Telefono
+39 0445 300499

E-mail
info@unicnet.com

Sito web
www.unicnet.com